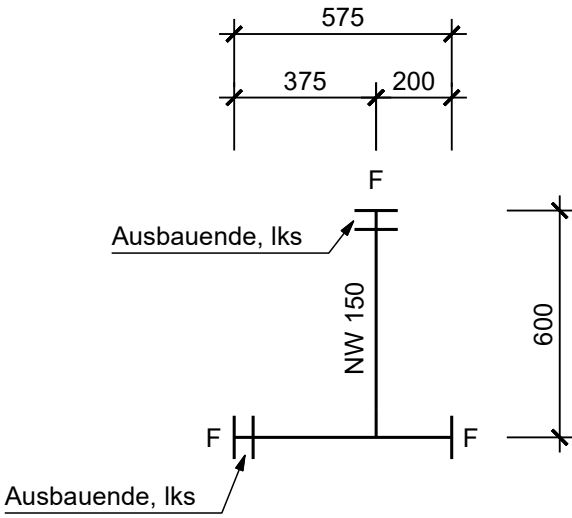
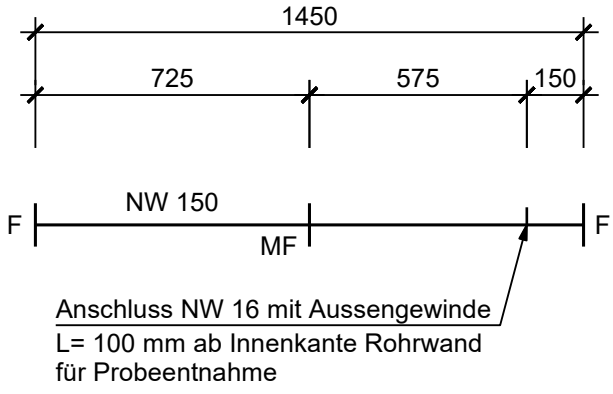
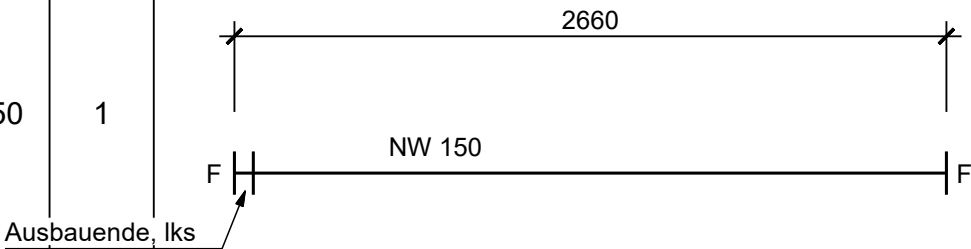
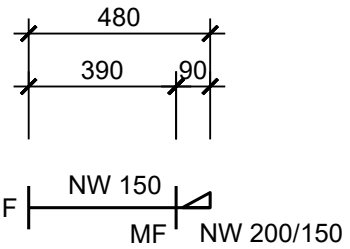


Datum: 21.01.2025/LT
HOF 24110-23


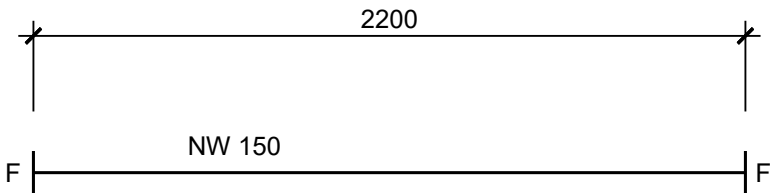
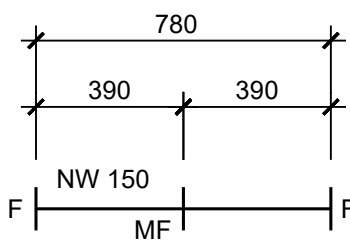
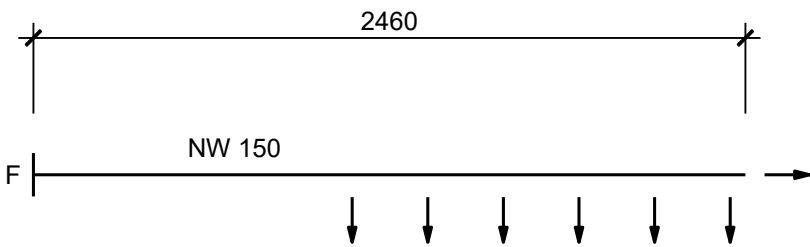

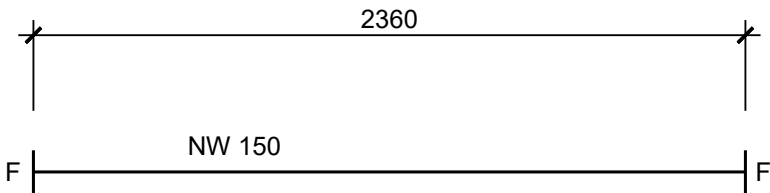
Edelstahl V2A (1-4301)

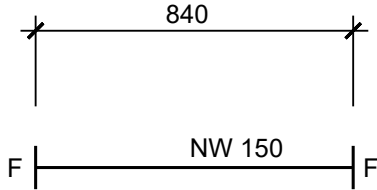
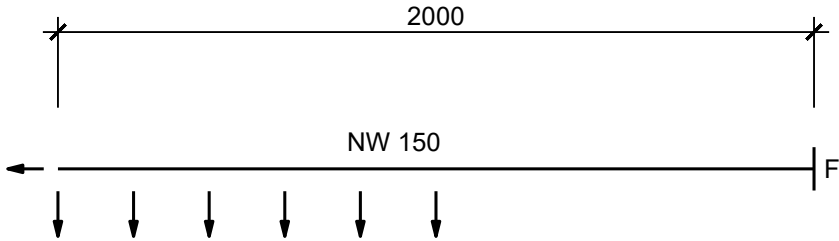

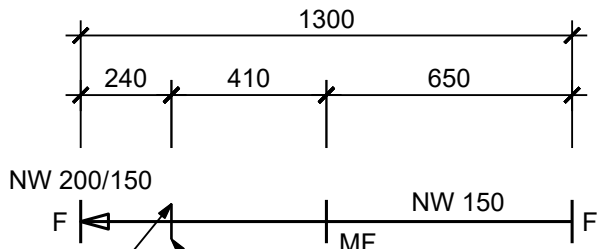
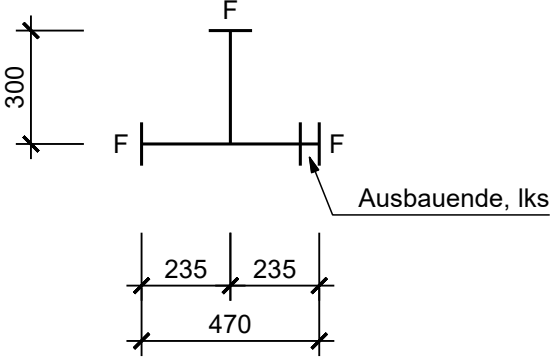
(Alle Masse in der Achse gemessen)

1

Pos.-Nr.	NW	Stk.	Form (Masse in mm)	PN
4	150	2		16
5	150	1		16
6	150	1		16
7	200/150	1		16

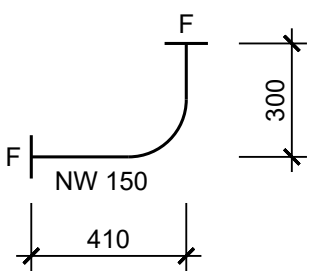
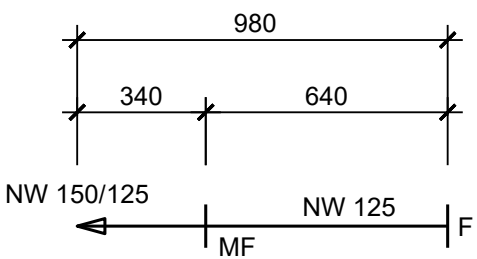
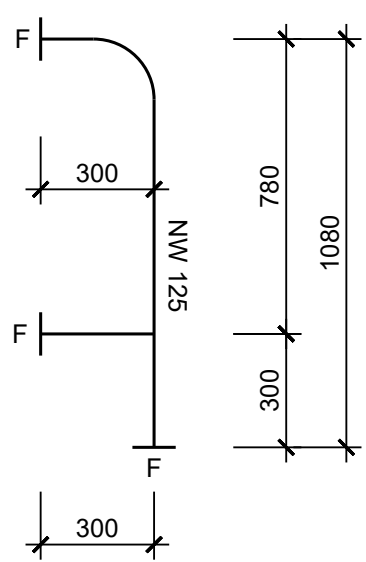
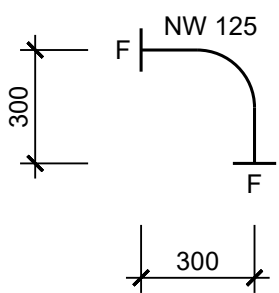
Pos.-Nr.	NW	Stk.	Form (Masse in mm)	PN
8	200/150	1	Anschluss NW 16 mit Aussengewinde L= 100 mm ab Innenkante Rohrwand für Probeentnahme	16
9	150	2		16
10	150	2		16
11	150	2		16
12	150	1		16

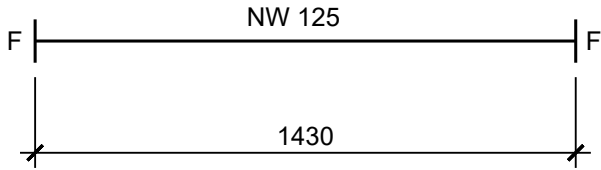
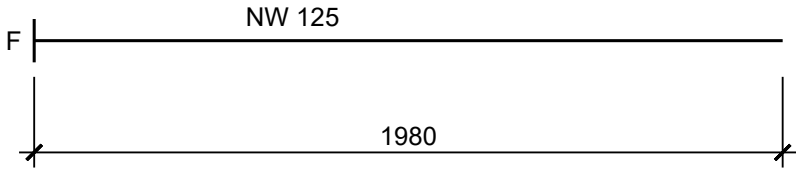
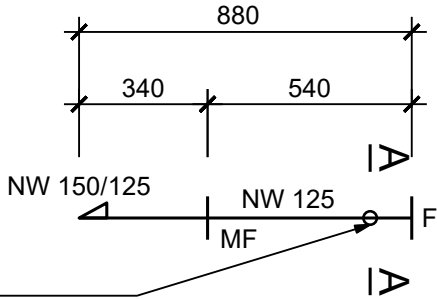
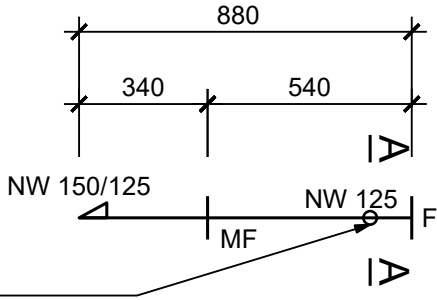
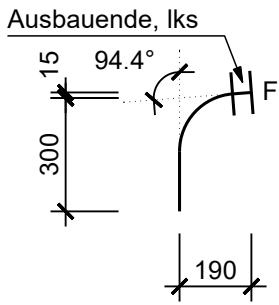
Pos.-Nr.	NW	Stk.	Form (Masse in mm)	PN
13	150	6		16
14	150	1		16
15	150	1		16
16	150	1	 Detail Bohrungen an Rohrsohle <u>Alle Bohrungen ø50 mm</u>  7 Bohrungen, Abstand 200mm	16
17	150	1		16


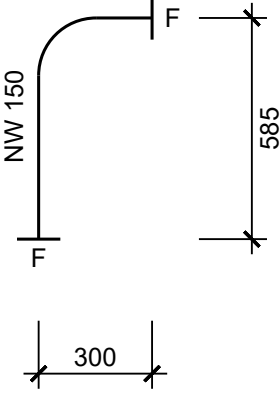
Pos.-Nr.	NW	Stk.	Form (Masse in mm)	PN
18	150	1		16
19	150	1	 Detail Bohrungen an Rohrsohle Alle Bohrungen ø50 mm  7 Bohrungen, Abstand 200mm	16
20	200/150	1		16
Anschluss NW 16 mit Aussengewinde L= 100 mm ab Innenkante Rohrwand für Probeentnahme			Anschluss NW 16 mit Aussengewinde L= 100 mm ab Innenkante Rohrwand für Hochdruckreiniger	
21	150	1	 Ausbauende, lks	16

Pos.-Nr.	NW	Stk.	Form (Masse in mm)	PN
22	150	1	<u>Grundriss</u> <u>Schnitt A-A</u>	16
23	150	4		16
24	150	2		16
25	150	2		16
26	150	2		16

Pos.-Nr.	NW	Stk.	Form (Masse in mm)	PN
27	150	1		16
28	150	1		16
29	150	1		16
30	200/150	2		16
31	150	1		16

Pos.-Nr.	NW	Stk.	Form (Masse in mm)	PN
32	150	1		16
33	150/125	2		16
34	125	1		16
35	125	1		16

Pos.-Nr.	NW	Stk.	Form (Masse in mm)	PN
36	125	1		16
37	125	1		16
38	150/125	1	<u>Grundriss</u>  <u>Schnitt A-A</u> 	16
39	150/125	1	<u>Grundriss</u>  <u>Schnitt A-A</u> 	16
40	125	2		16

Pos.-Nr.	NW	Stk.	Form (Masse in mm)	PN
41	150	1		16
42	150	1		16